




UNC INOX.

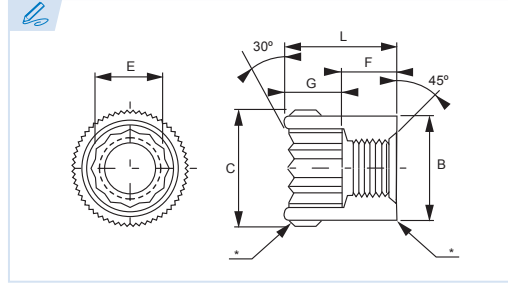

Tuerca Allenuts con carraca interna UNC
Internal wrenching Allenuts UNC
Écrou Allenuts à cliquet interne UNC
Porca Allenuts com catraca interna UNC

Acero inoxidable
Stainless steel
Acier inoxydable
Aço inoxidável



Roscas según UNC-2B (ANSI B.1.1/FED-STD-H28)

Threads according
Filetages suivant
Roscas conforme

ES EN FR PT

Hilos por pulgada
Threads per inch
Filet par pouce
Fios por polegada

Cantidad en caja x100
Box qty.
Boîteage
Quantidade na caixa

Ref.	D		L	B	C	E	F	G
HTASNC-4	#4	40	0.172-0.179	0.183-0.187	0.205-0.209	1/8	0.080	0.046
HTASNC-6	#6	32	0.223-0.230	0.253-0.257	0.274-0.278	5/32	0.100	0.071
HTASNC-8	#8	32	0.266-0.273	0.275-0.280	0.302-0.307	3/16	0.125	0.084
HTASNC-10	#10	24	0.309-0.319	0.302-0.307	0.331-0.336	3/16	0.170	0.096
HTASNC-1-4	1/4	20	0.409-0.419	0.398-0.403	0.425-0.430	1/4	0.225	0.136
HTASNC-5-16	5/16	18	0.512-0.522	0.493-0.498	0.521-0.526	5/16	0.285	0.165
HTASNC-3-8	3/8	16	0.606-0.621	0.585-0.590	0.615-0.620	3/8	0.325	0.195

*
Redondeado o con chaflán.
Rounded or chamfered.
Arrondi ou avec chanfrein.
Arredondado ou com chanfro.

Artículo bajo consulta sujeto a cantidades mínimas.
Item being searched is subject to a minimum order.
Produit sur demande avec quantités minimum.
Artigo disponível sob consulta, sujeito a quantidades mínimas.